



FEATURES



- Facilitates finger-tight nozzle adjustment without disturbing piping system.
- No tools required for repositioning.
- Positive O-ring seal handles pressures up to 35 Bar.G.
- No internal obstructions.
- Complete 360° radial adjustment.
- Up to 50° angular adjustment.

CONSTRUCTION AND MATERIALS

- Available with Male BSPT inlet connections and Female BSPP outlets.
- Available in Brass and Stainless Steel.
- Other materials available to special order.

ORDER EXAMPLE

W09111-4 (3/8" x 1/4") Stainless Steel.

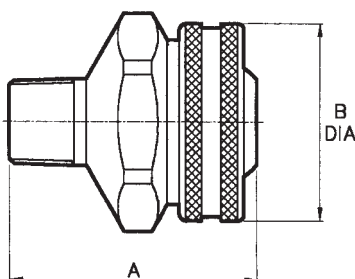

CAPACITY CHART

ASSEMBLY NUMBER	INLET SIZE BSPT	OUTLET SIZE BSPP	DIMENSIONS (mm)			ANGULAR ADJUSTMENT (°)
			A	B	C Hex	
W09111-1	1/8"	1/8"	28,6	25,4	20,8	50
W09111-2	1/4"	1/8"	28,6	25,4	20,8	50
W09111-3	1/4"	1/4"	34,9	31,8	25,7	50
W09111-4	3/8"	1/4"	34,9	31,8	25,7	50
W09111-5	3/8"	3/8"	44,5	38,1	31,8	40
W09111-6	1/2"	1/2"	55,6	44,5	31,8	40
W09111-7	3/4"	3/4"	61,1	50,8	38,0	40
W09111-8	1"	1"	75,0	70,0	60,0	40

Contact our Helpline for any special requirements:
Tel: +44 (0) 151 424 6821
Fax: +44 (0) 151 495 1043
e-mail: sales@delavan.co.uk
Web: www.delavan.co.uk