



BALL CHECK VALVE




BALL CHECK NOZZLE

**FEATURES**


- Especially designed to stop drooling or dripping in car washing or other cleaning applications to prevent line from emptying during wash cycles.
- The Ball Check Valve Assembly is for use with standard 1/8" and 1/4" NPT Male threaded nozzles.
- The Ball Check Nozzle Assembly is for use with standard flanged type nozzles.
- Available with spring pressures of 0,2, 0,35 and 0,7 Bar.G.

**CONSTRUCTION AND MATERIALS**

- 1/8" or 1/4" NPT Male threaded inlets.
- Available in Brass, Stainless Steel and Nylon.
- Ball and spring are Stainless Steel.
- Seal washer is Nylon.

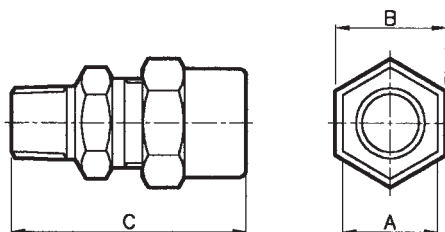

BALL CHECK VALVE

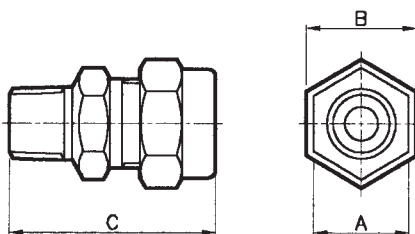

BALL CHECK NOZZLE

**DIMENSIONS (mm)**

Assembly Size	A Hex	B Hex	C
1/8"	17,5	20,7	43,7
1/4"	17,5	20,7	44,5

**DIMENSIONS (mm)**

Assembly Size	A Hex	B Hex	C
1/8"	17,5	20,7	38,7
1/4"	17,5	20,7	39,5

**BALL CHECK VALVE ASSEMBLY**

ASSEMBLY NUMBER			INLET NPTM	OUTLET NPTF	SPRING PRESSURE	SPRING PART No.	BALL PART No.	WASHER PART No.
BRASS	STAINLESS STEEL	NYLON						
28800-1			1/8"	1/8"	0,7 Bar	27211	13809	37538
28800-26	28800-36		1/4"	1/4"	0,35 Bar	27211	13809	37538
		37444-1	1/4"	1/4"	0,7 Bar	27211	13809	37538
		37444-4	1/4"	1/4"	0,2 Bar	50375	13809	37538

**BALL CHECK NOZZLE ASSEMBLY**

ASSEMBLY NUMBER			INLET NPTM	SPRING PRESSURE	SPRING PART No.	BALL PART No.	WASHER PART No.
BRASS	STAINLESS STEEL	NYLON					
29800-1			1/8"	0,7 Bar	27211	13809	37538
29800-13	29800-17		1/4"	0,35 Bar	27211	13809	37538
		37444-3	1/4"	0,7 Bar	27211	13809	37538

Contact our Helpline for any special requirements:  
Tel: +44 (0) 151 424 6821  
Fax: +44 (0) 151 495 1043  
e-mail:sales@delavan.co.uk  
Web:www.delavan.co.uk

