



DF BODIES

CHARACTERISTICS


- Dela-Fit bodies are designed to accept any tip from the Dela-Fit range as well as any of the threaded adaptors.

CONSTRUCTION AND MATERIALS

- 1/4", 3/8" and DFW Welding bodies are for nozzles designated 'S' in the nozzle size chart. 1/2" bodies are for nozzles designated 'L'.
- EPDM Seals are Standard, Viton optional.
- Threaded bodies available in Brass and 316 Stainless Steel.
- Welding nipples available in 316 Stainless Steel and Mild Steel.
- Thread sizes are Male BSPT and Female BSPP.

DIMENSIONS (mm)

Body Type	A	B Hex
1/4" DFM (Male)	28,6	20,8
3/8" DFM (Male)	28,6	20,8
1/2" DFM (Male)	36,5	28,0
1/4" DFF (Female)	30,7	20,8
3/8" DFF (Female)	31,0	20,8
1/2" DFF (Female)	34,9	28,0
DFW (Welding)	19,0	20,8
1/2" DFF (Welding)	25,4	28,0

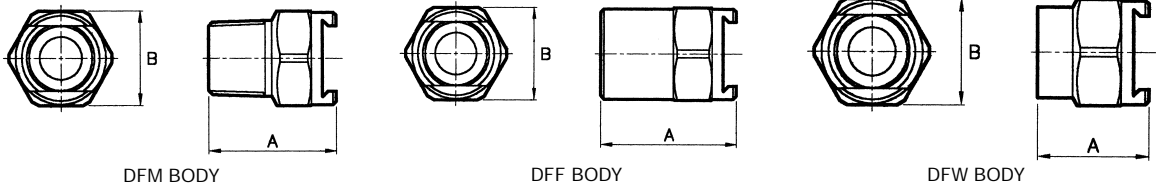

DFM BODY

DFF BODY

DFW BODY

AD ADAPTORS

CHARACTERISTICS


- Adapts standard threaded nozzles, hose fittings or accessories to the Dela-Fit system.
- Can function as quick release couplings.

CONSTRUCTION AND MATERIALS

- Available in Brass and 316 Stainless Steel.
- Thread sizes are Male BSPT and Female BSPP.

DIMENSIONS (mm)

Adaptor Type	A	B Hex
DF x 1/4" ADM (Male)	30,4	18,0
DF x 3/8" ADM (Male)	30,4	18,0
1/2" DF x 1/2" ADM (Male)	38,0	28,0
DF x 1/4" ADF (Female)	23,2	18,0
DF x 3/8" ADF (Female)	26,2	20,8
1/2" DF x 1/2" ADF (Female)	30,5	28,0

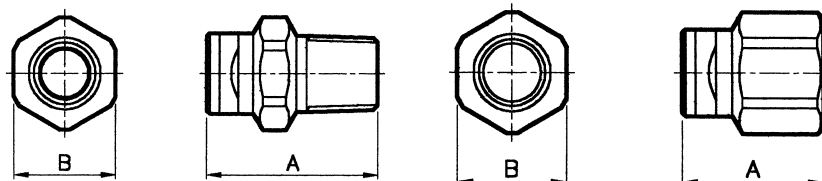

DFM ADAPTOR

DFF ADAPTOR

TYPE DF / AD

DELA-FIT

DF

Contact our Helpline for any special requirements:
Tel: +44 (0) 151 424 6821
Fax: +44 (0) 151 495 1043
e-mail: sales@delavan.co.uk
Web: www.delavan.co.uk